



INSTALLATION INSTRUCTIONS FOR THE DP-DTHBS-WZ STRUCTURE

(Mounting along the short side of the panel)

Manufacturer:

BAKS

5 Jagodne Street

05-480 Karczew

Poland

Steel structure for a flat roof in ballast version.

Installation of PV panels in a horizontal arrangement (horizontal)
along the short side of the panel.



BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street

05-480 Karczew

NIP: 5320102041

Regon: 008278930

Internet: www.baks.com.pl

Email: baks@baks.com.pl

Tel. 22 710 81 00



1. Essential tools for assembling the structure

- Allen wrench size 6
- Cordless screwdriver with speed and torque control
- Hexagon bit, Allen size 6 for screwdriver head
- 13 mm Combination wrenches
- Ratchet wrench with 13 mm sockets
- Extension 100-120mm for socket wrenches
- Rubber hammer
- Torque wrench range 10-30 Nm

2. General information

- Possibility of using the structure in wind and snow zones in accordance with the following standards: **PN-EN 1991-1-3** and **PN-EN 1991-1-4**
- **Before proceeding with the installation of the structure, you should read the installation instructions for photovoltaic panels**
- Values and ballast placement individually determined by the authorized constructor
- The BUFEK.../PUFK fastening clamps should be tightened to 12-14 Nm (verify with the module manufacturer's installation instructions)
- Contact details of BAKS technical support - possibility of contact Mon-Fri Mon-Fri 7 a.m. - 3 p.m.

marek.cedrowski@baks.com.pl tel: +48 22 710 81 96,+48 667 944 952

-Deputy Head of the Photovoltaics Department

radoslaw.kramek@baks.com.pl Tel: +48 22 710 81 96 – Technical Advisor

adam.wojciak@baks.com.pl Tel: +48 22 710 81 23 – Technical Advisor



3. List of elements included in the DP-DTHBS-WZ structure

No	Name	Product symbol	Purpose in construction
1	Bottom profile	PDTSWZMC	Load-bearing profile
2	Upper profile	PGTSWZMC	Panel support
3	Side handle CLICK	BUFF...	Side clamp fixing panels
4	Middle Clamp CLICK	PUFK	Middle Clamp fixing panels
5	Screw set	SKKM8x12E	Fixing the bottom profile with the top profile
6	Ballast base	PBKJ40MC	Base for ballast
		PBKD40MC	Ballast base for increased ballast (optional)
7	Vibro-insulating rubber	SBV250x350	Separation between the supporting elements and the roof sheathing
8	C-section base with vibro-insulating rubber	PC100J	Prevents the ends of the steel profiles from pressing against the roof sheathing

Table 1 Construction Elements Overview

4. Mounting of the structure type DP-DTHBS-WZ (mounting on the short side of the panel)

Dimensions A and B (dimension B is the length of the module + 20mm) depends on the size of the modules to be installed. It should be determined by physically fitting the module to the mounted PDTSWZMC and PGTSWZMC profiles.

The maximum size of the modules that can be correctly mounted on the DP-DTHBS-WZ structure on the short side of the panel is: 2100mm long x 1150mm wide (to be verified with the module manufacturer)



By selecting the appropriate mounting hole in the base of the PDTSWZMC, we set the angle of the structure according to Figure 1

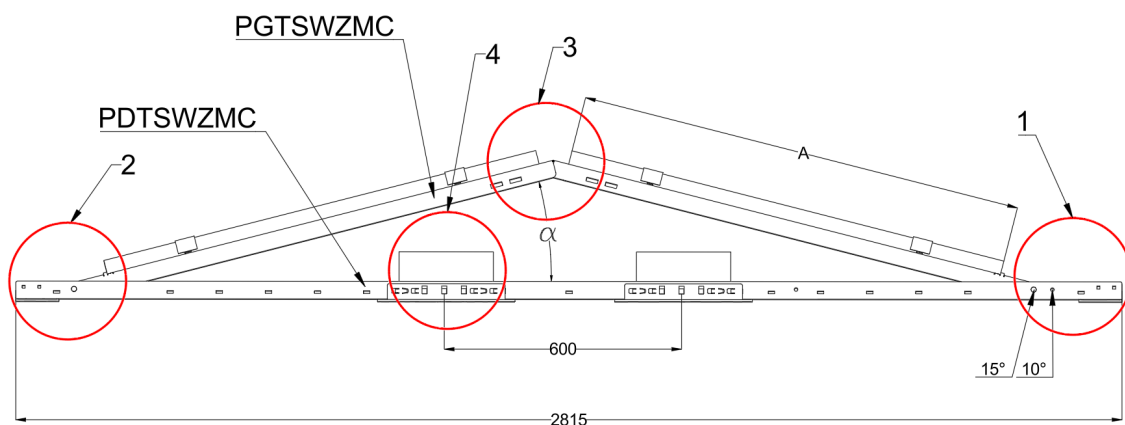


Figure 1.





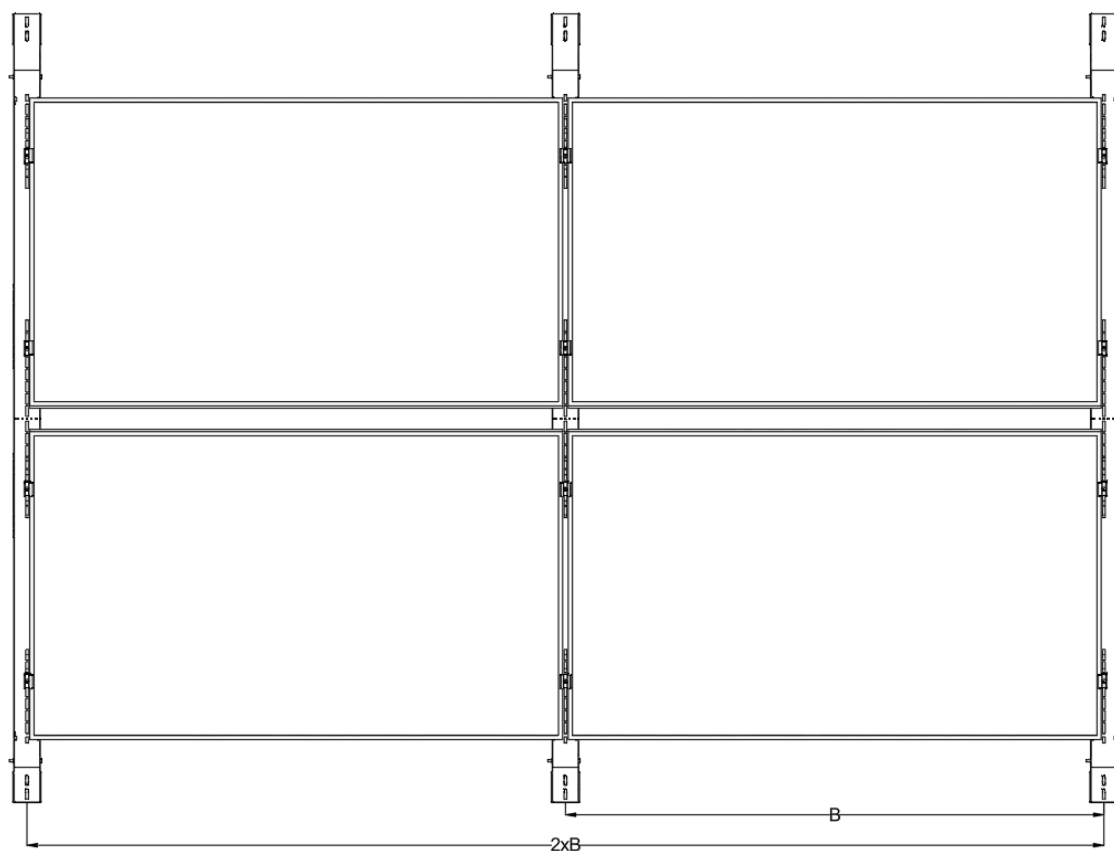



Figure 2.

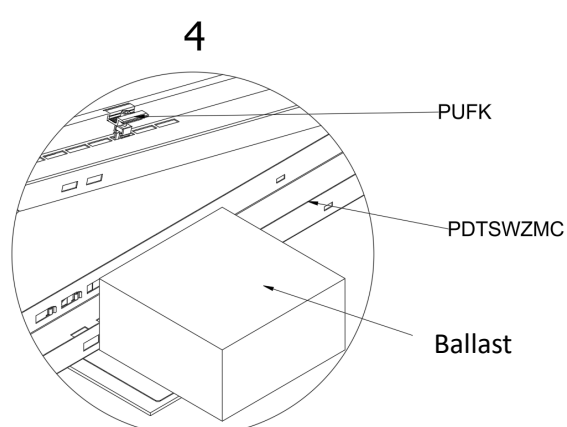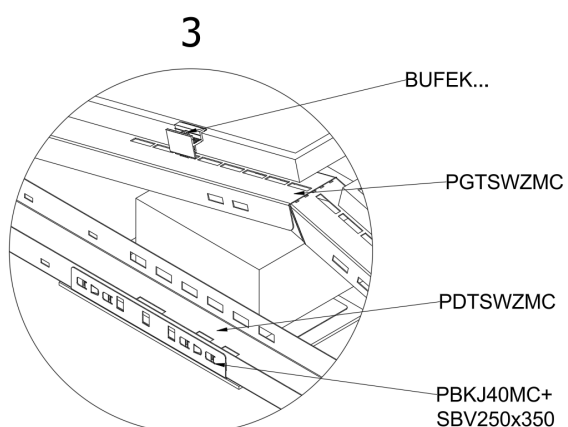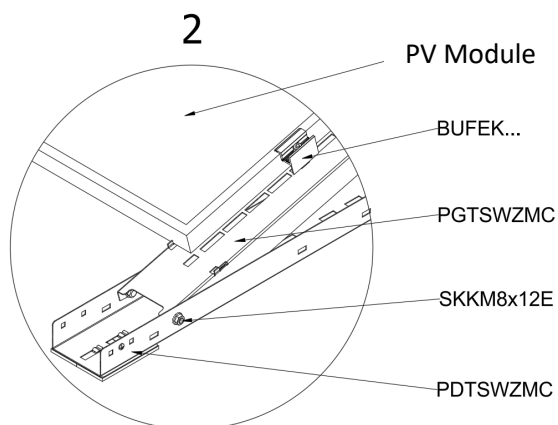

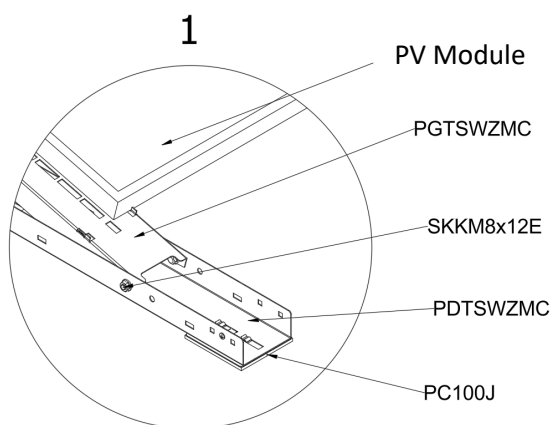


POSSIBILITY OF MOUNTING BALLAST:

-cable tray KFJ300H60/... MC+PC100J Base

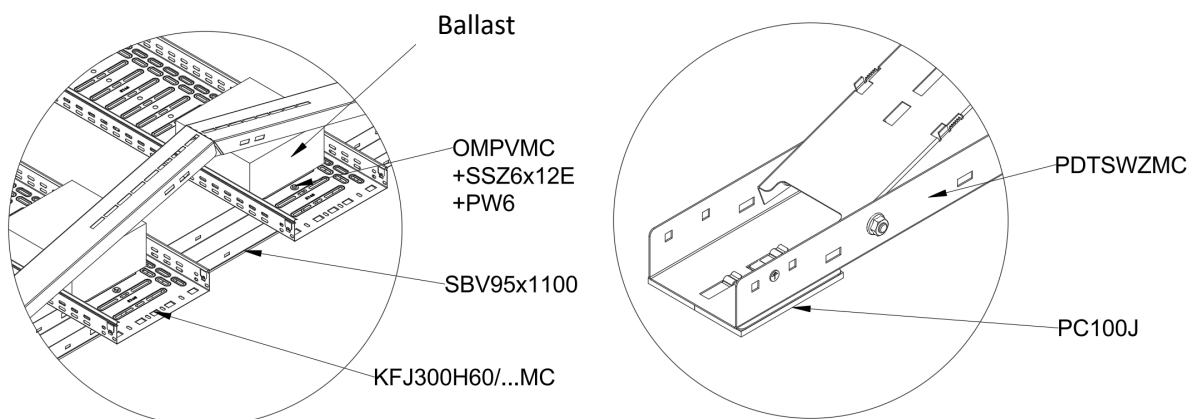

- paving stones in the base of PDTSWZMC

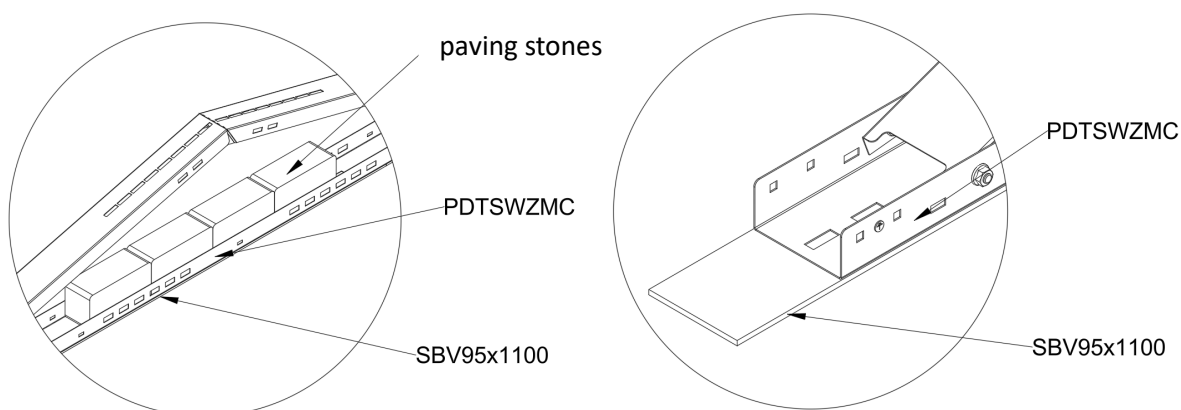

BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street
05-480 Karczew
NIP: 5320102041
Regon: 008278930



Internet: www.baks.com.pl

Email: baks@baks.com.pl



Tel. 22 710 81 00



- Adjustable bases of the click SKR95MC type + ballast bases of the click SKRB95MC type

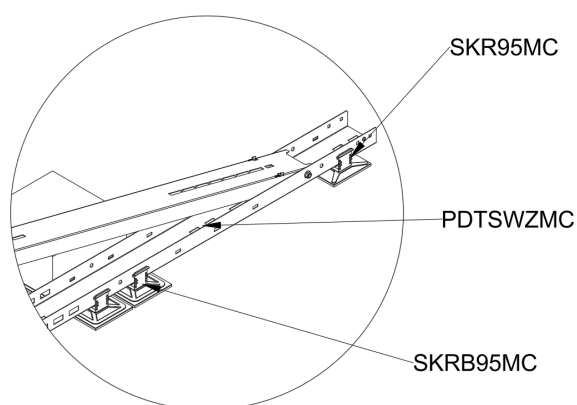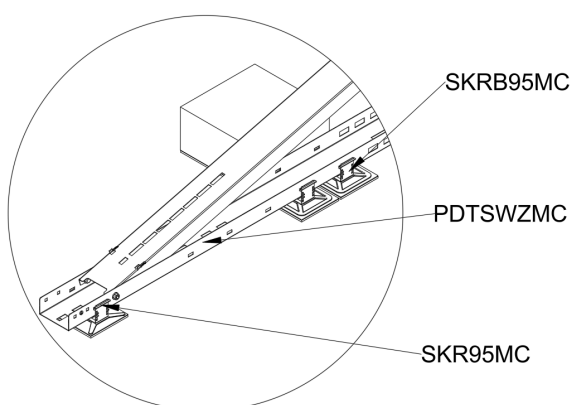


- concrete block laid on the basis of PDTSWZMC

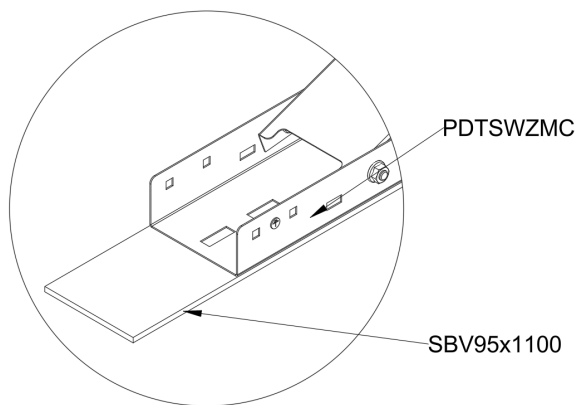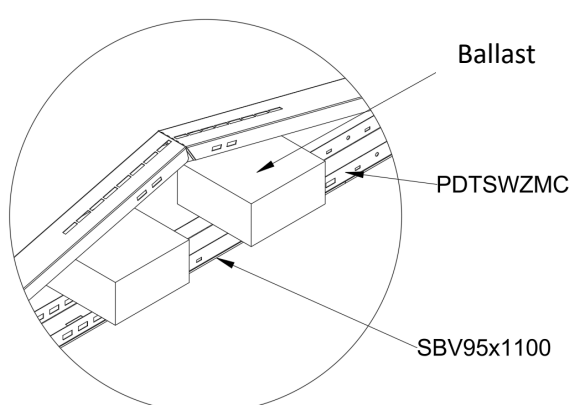




-adjustable bases of the click SKR95MC type + KFJ300H60/... MC

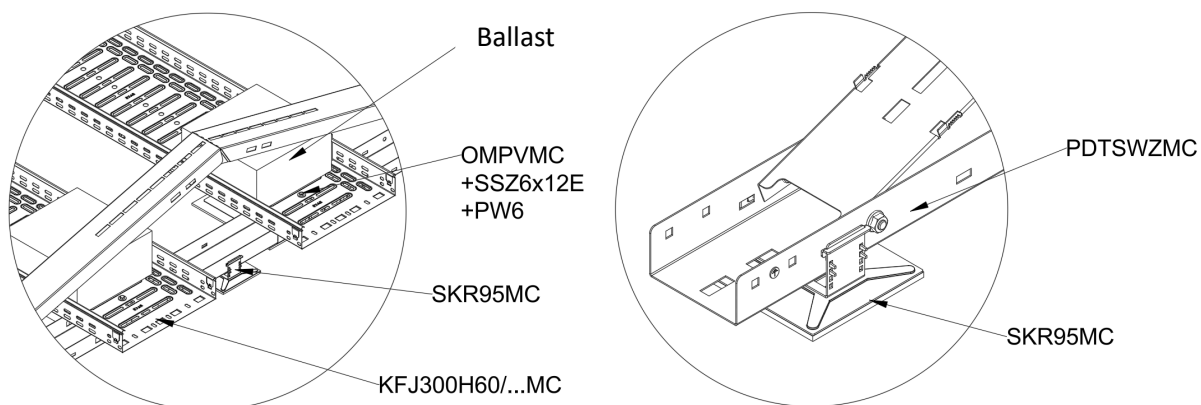

-click PBKJ40MC bases + SBV250x350 rubber

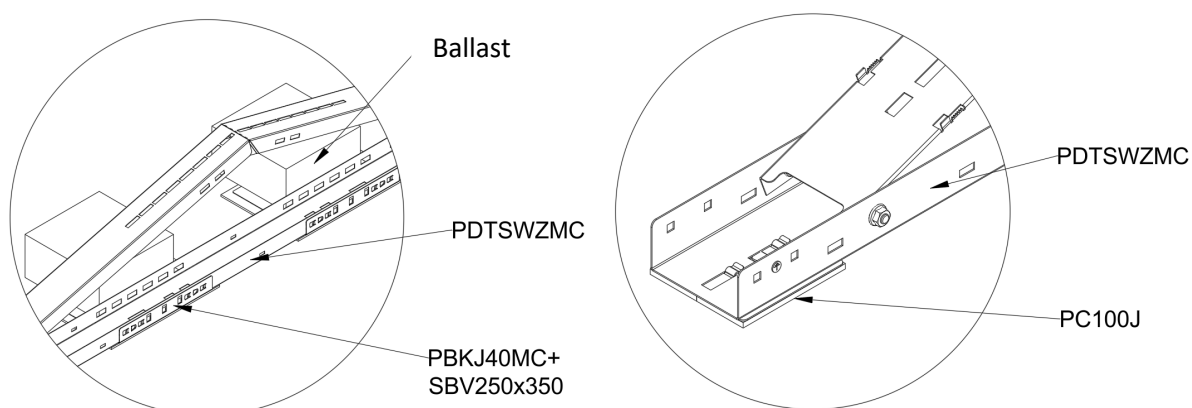

BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street
05-480 Karczew
NIP: 5320102041
Regon: 008278930

Internet: www.baks.com.pl

Email: baks@baks.com.pl

Tel. 22 710 81 00



INSTALLATION INSTRUCTIONS FOR THE DP-DTHBS-WZ STRUCTURE

(installation along the long side of the panel)

Manufacturer:

BAKS

5 Jagodne Street

05-480 Karczew

Poland

Steel structure for a flat roof in ballast version.

Installation of PV panels in a horizontal arrangement (horizontal)
along the long side of the panel.



BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street

05-480 Karczew

NIP: 5320102041

Regon: 008278930

Internet: www.baks.com.pl

Email: baks@baks.com.pl

Tel. 22 710 81 00



5. Essential tools for assembling the structure

- Allen wrench size 6
- Cordless screwdriver with speed and torque control
- Hexagon bit, Allen size 6 for screwdriver head
- 13 mm spanners
- Ratchet wrench with sockets in 13 mm sizes
- Extension 100-120mm for socket wrenches
- Rubber hammer
- Torque wrench range 10-30 Nm

6. General information

- Possibility of using the structure in wind and snow zones in accordance with the following standards: **PN-EN 1991-1-3** and **PN-EN 1991-1-4**
- **Before proceeding with the installation of the structure, you should read the installation instructions for photovoltaic panels**
- Values and ballast placement individually determined by the authorized constructor
- Clamping clamps BUFEK... should be tightened with a torque of 12-14 Nm (verify with the assembly instructions of the module manufacturer)
- Contact details of BAKS technical support - possibility of contact Mon-Fri Mon-Fri 7 a.m. - 3 p.m.

marek.cedrowski@baks.com.pl tel: +48 22 710 81 96,+48 667 944 952

-Deputy Head of the Photovoltaics Department

radoslaw.kramek@baks.com.pl Tel: +48 22 710 81 96 – Technical Advisor

adam.wojciak@baks.com.pl Tel: +48 22 710 81 23 – Technical Advisor



7. List of elements included in the DP-DTHBS-WZ structure

No	Name	Product symbol	Purpose in construction
1	Bottom profile	PDTSWZMC	Load-bearing profile
2	upper profile	PGTSWZMC	Panel support
3	Side clamp CLICK	BUFF...	Side clamp fixing panels
5	Screw set	SKKM8x12E	Fixing the bottom profile with the top profile
7	Ballast base	PBKJ40MC	Base for ballast
		PBKD40MC	Ballast base for increased ballast (optional)
8	C-section base with vibro-insulating rubber	PC100J	Prevents the ends of the steel profiles from pressing against the roof sheathing
8	Vibro-insulating rubber	SBV250x350	Separation between the supporting elements and the roof sheathing

Table 2 Construction Elements Overview

8. Mounting of the structure type DP-DTHBS-WZ (mounting on the long side of the panel)

Dimension A,B,C and D (Dimension D is the mounting distance of the panel clamp as specified in the assembly instructions by the module manufacturer). Dimension B is the resulting dimension depending on the length of the module.

Dimension A is the width of the panel (the maximum width of the panel that can be mounted is 1150mm).

Dimension D is the length of the module.



By selecting the appropriate mounting hole in the base of the PDTSWZMC, we set the angle of the structure according to Figure No. 1

Note: An equalization connection must be made to maintain electrical continuity by connecting the PDTSWZMC bases to each other every PV panel according to Figure No. 2

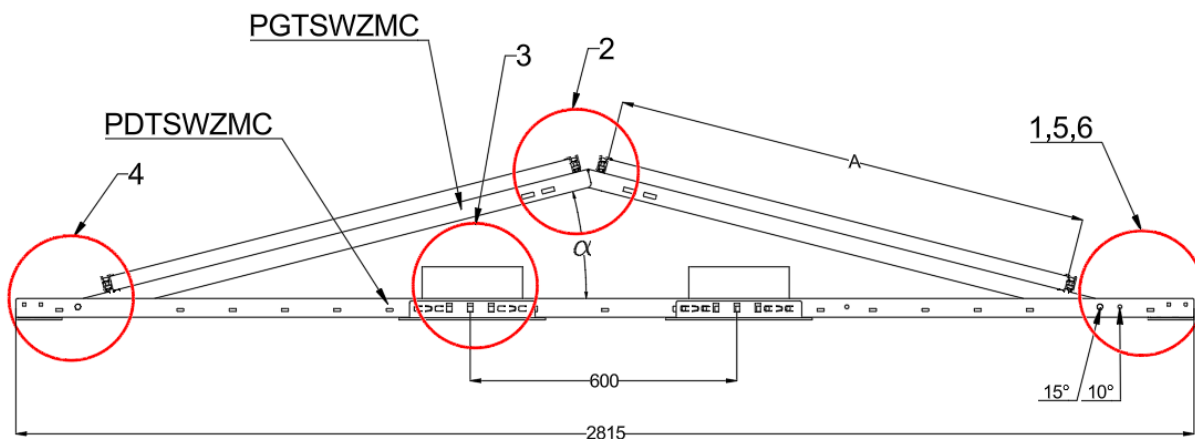


Figure 2.

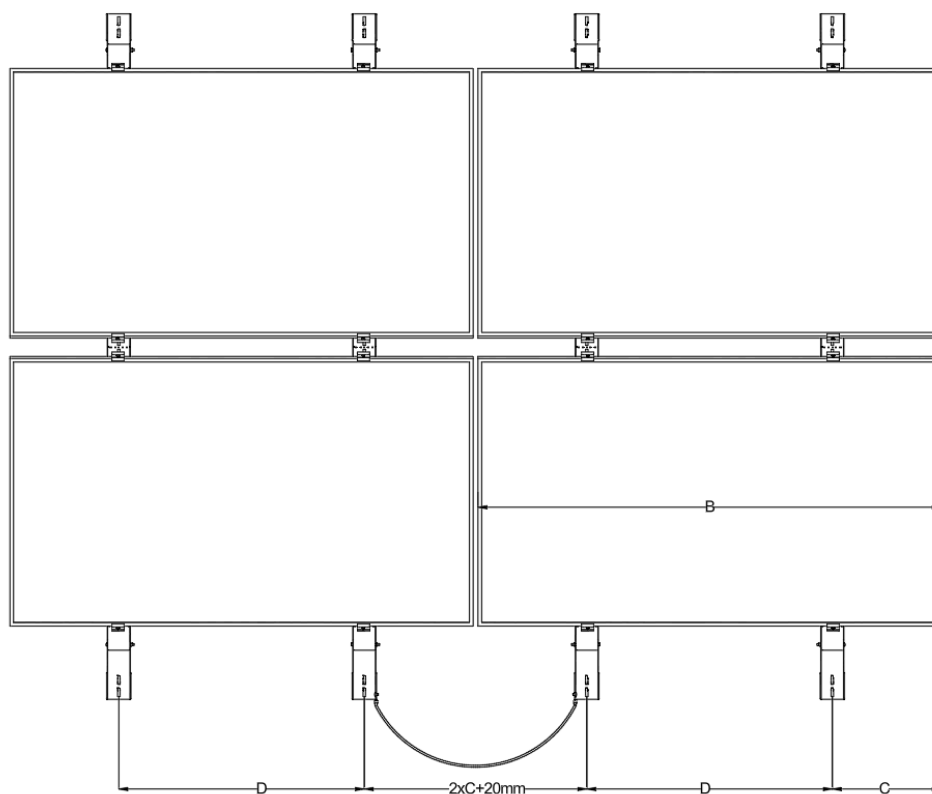


Figure 2.







BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street
05-480 Karczew
NIP: 5320102041
Regon: 008278930

Internet: www.baks.com.pl

Email: baks@baks.com.pl


Tel. 22 710 81 00

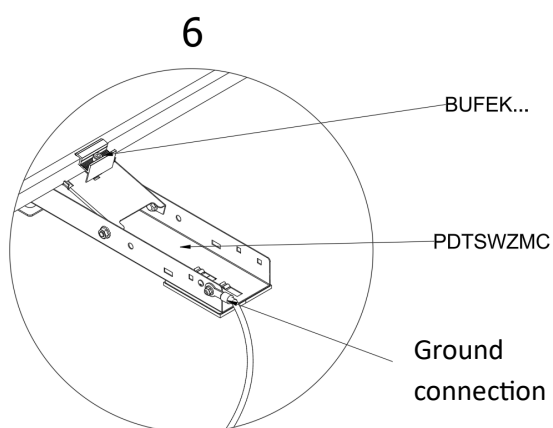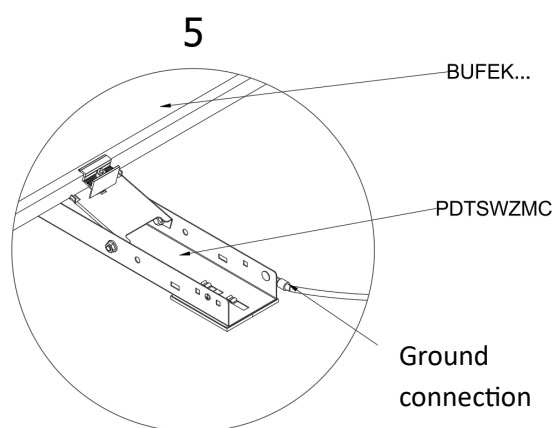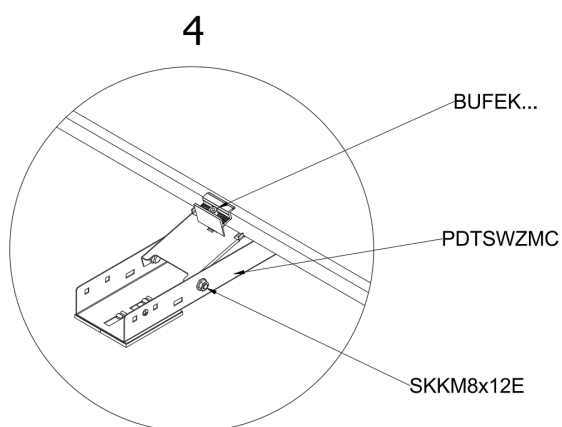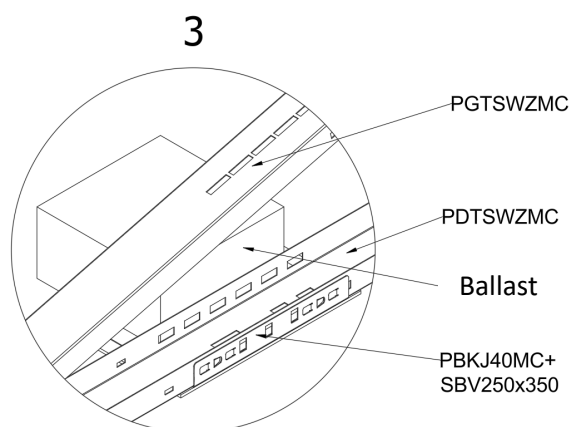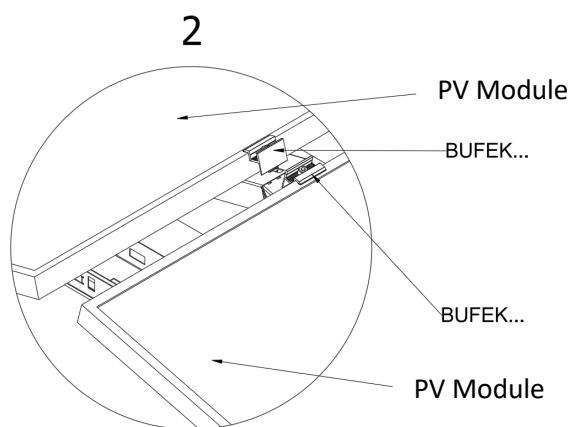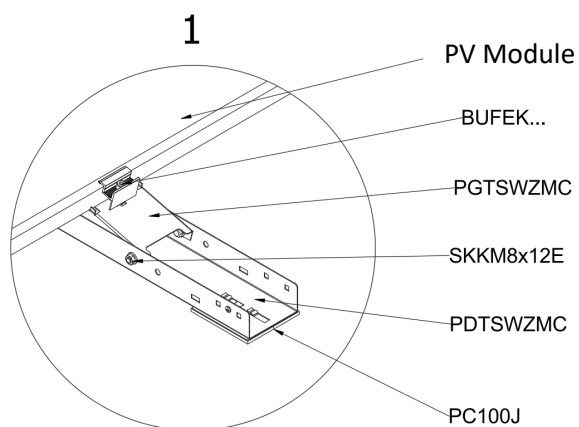




POSSIBILITY OF MOUNTING BALLAST:

-cable tray KFJ300H60/... MC+PC100J Base

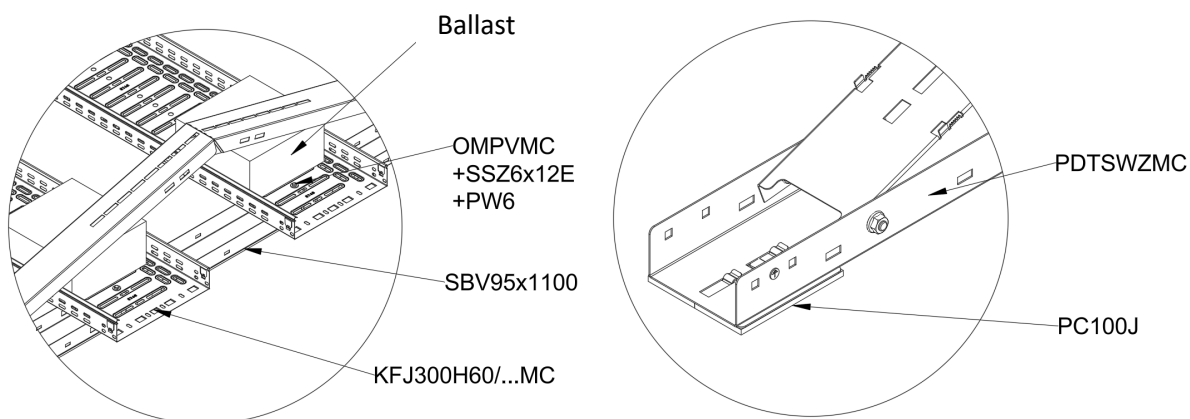

- paving stones in the base of PDTSWZMC

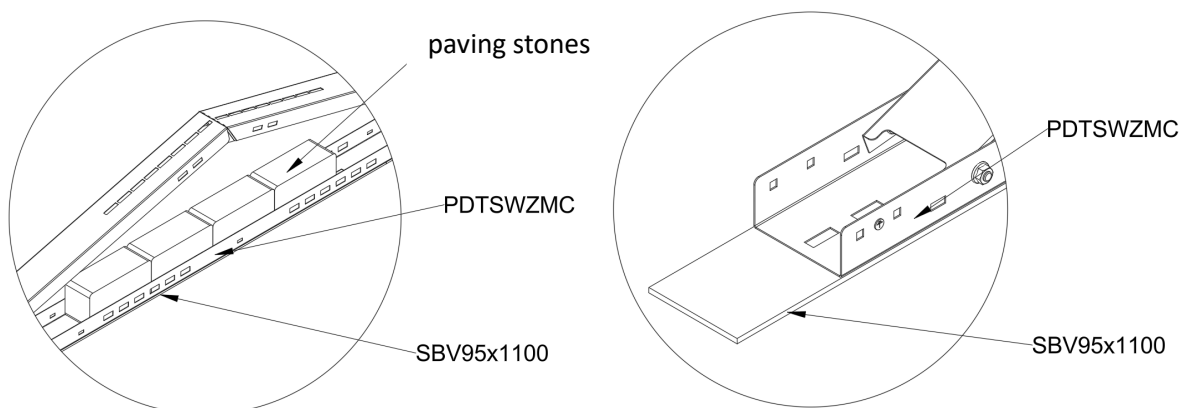


BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street
05-480 Karczew
NIP: 5320102041
Regon: 008278930


Internet: www.baks.com.pl
Email: baks@baks.com.pl
Tel. 22 710 81 00



- Adjustable bases of the click SKR95MC type + ballast bases of the click SKRB95MC type

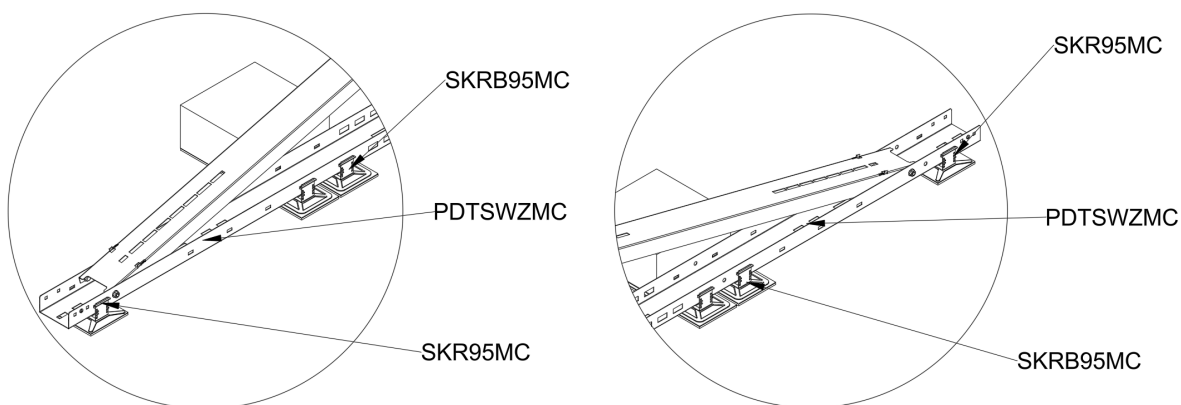

- concrete block laid on the basis of PDTSWZMC

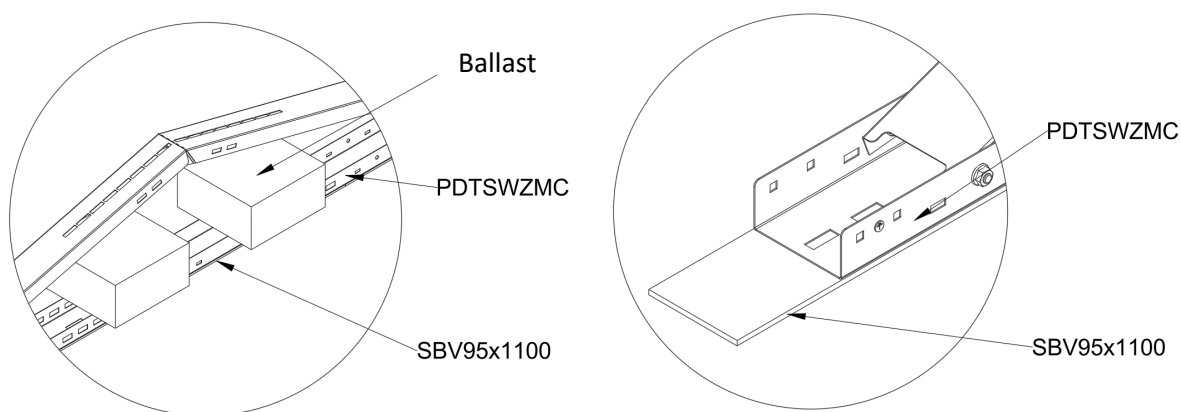

BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street
05-480 Karczew
NIP: 5320102041
Regon: 008278930



Internet: www.baks.com.pl

Email: baks@baks.com.pl



Tel. 22 710 81 00



-adjustable bases of the click SKR95MC type + KFJ300H60/... MC

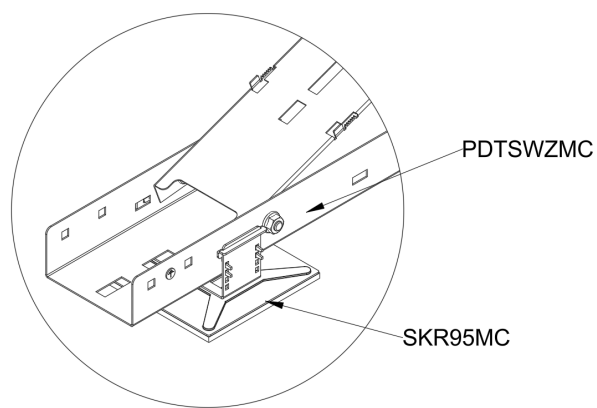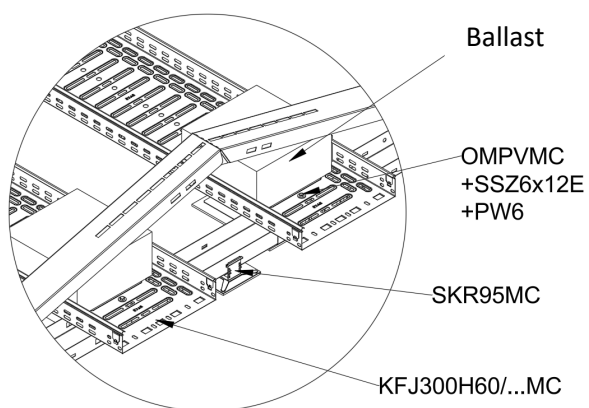

-click PBKJ40MC bases + SBV250x350 rubber

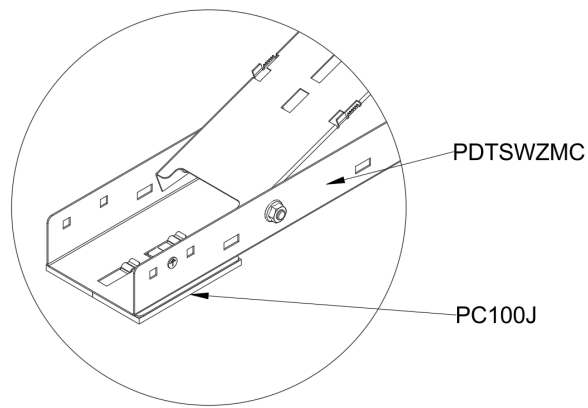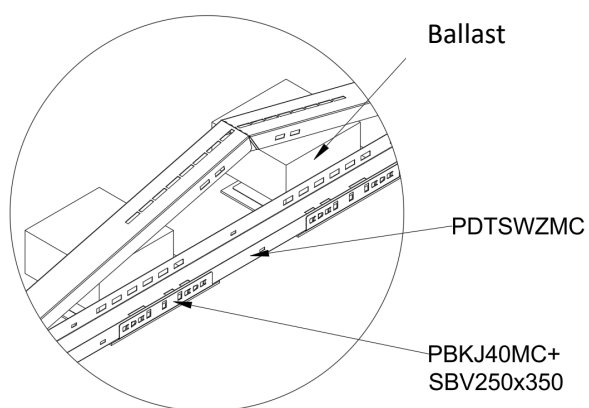

BAKS - KAZIMIERZ SIELSKI

5 Jagodne Street
05-480 Karczew
NIP: 5320102041
Regon: 008278930

Internet: www.baks.com.pl

Email: baks@baks.com.pl

Tel. 22 710 81 00